GEEPLUS BRS4036G-10

Device drawn with shaft aligned to mid position
Nominal 10Ω, 8mH (At 0°) for operation at 24v, 9%ED
Rotor Inertia 6.5 gcm²
Life Expectancy >10M cycles, no load
Optimal rotation +/- 30°, Mass 155 gramms
Turns CW from position shown, +ve applied to Red lead
Leadwires AWG24 stranded leads

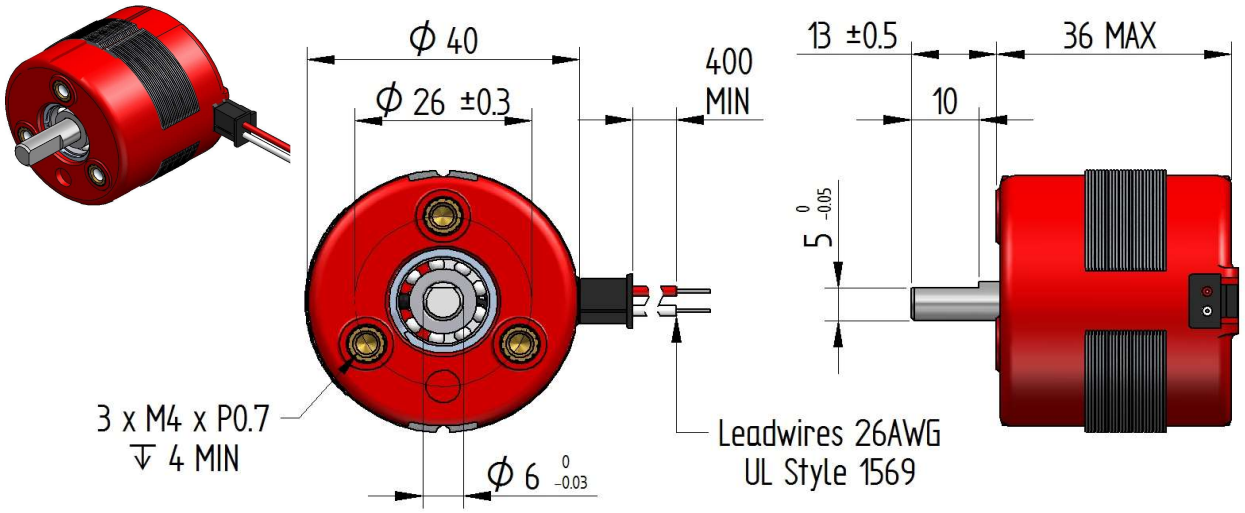

Torque (mNm) vs Angle

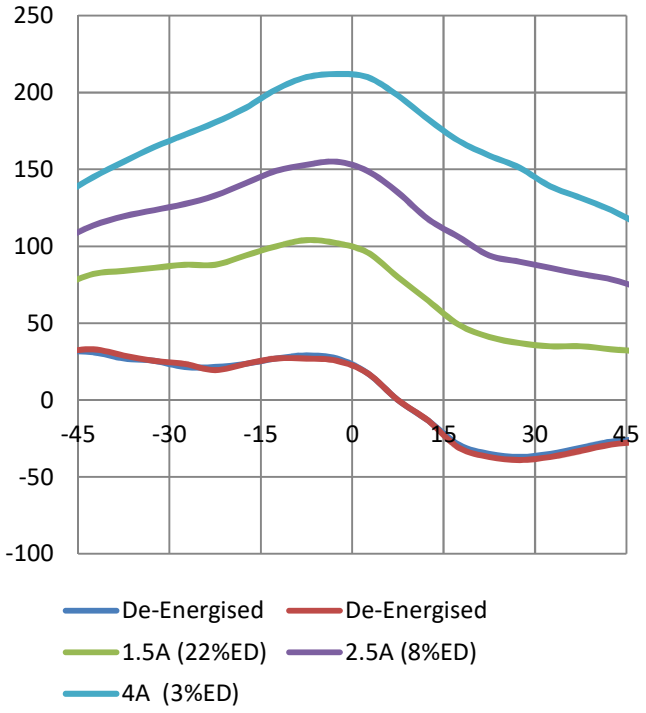

Response (ms) vs Load Inertia (gcm²)

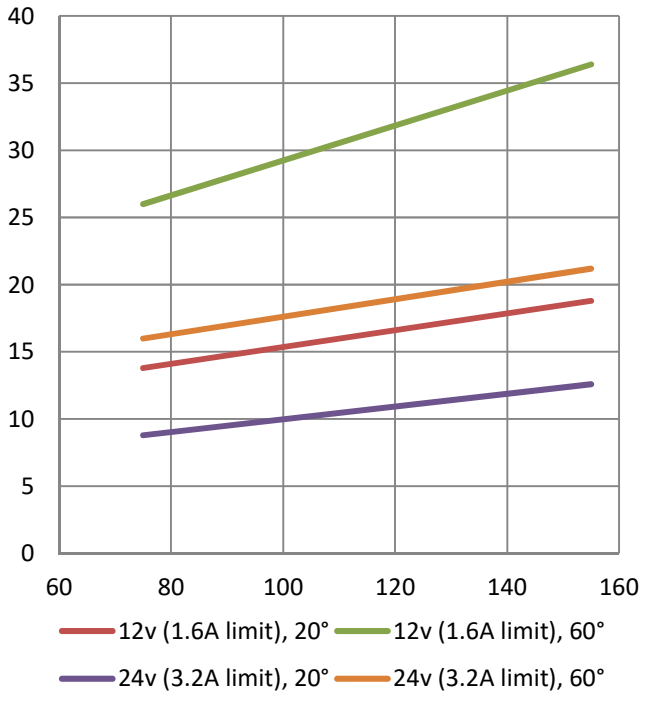

Geeplus reserves the right to change specifications without notice
www.geeplus.biz e-mail: info@geeplus.biz